

Installation Sheet

IMPORTANT INFORMATION


- It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies to the current IEE wiring regulations.
- These instructions should be read carefully and retained after installation for future reference and maintenance.
- Ensure all electrical connections are secure and that there are no loose strands.
- Do not install this product on newly plastered or damp surfaces.
- The LEDs in this light are not replaceable.

PRODUCT SPECIFICATION

- Electrical Classification: Class I
- Voltage: 240V 50Hz
- Ingress Protection: IP20
- Lumens/Watt 110lm/Watt
- Colour Temp.: 3000K

Part Code	Wattage	Color Temperature	Lumen
HG-L203-20W/4ft	20W	3000K	2200 lm
HG-L203-40W/4ft	40W	3000K	4400 lm

DIMENSIONS

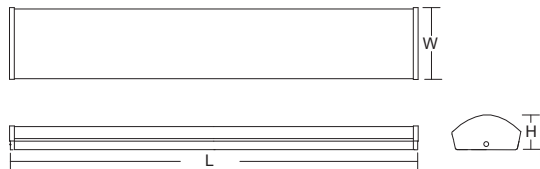


Part Code	Lamp Size (LxWxH)
HG-L203-20W/4ft	588x182x102mm
HG-L203-40W/4ft	1188x182x102mm

GUARANTEE

This product is guaranteed for a period of 5 years from the date of purchase. The guarantee is invalid in the case of improper use, improper installations or tampering. Should the product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. The provider is not responsible for any costs associated with the replacement of this product.

DESCRIPTION: LED Surface Mounted Light

APPROVALS & CLASSIFICATIONS



ALWAYS SWITCH OFF THE MAINS SUPPLY BEFORE INSTALLATION OR SERVICING

SUGGESTED METHOD OF INSTALLATION

Read Instructions and check you have all the tools and accessories to complete the installation correctly.

STEP 1

Isolate the mains supply before commencing with the installation. Unpack the luminaire and check that you have all the tools to install the luminaire safely and in compliance with current electrical standards. Ensure there are no obstructions or services in the way.

STEP 2

Remove the diffuser from the fitting.

STEP 3

(a) Feed the mains cable through the back of the fitting. (b) Hold the fitting up to the ceiling in the desired position and mark hole fixing centres. (c) Drill fixing holes. (d) Insert rawl plugs. (e) Fix in position with fixings supplied.

STEP 4

Ensure the luminaire has a continuous live supply to "L" (Switched Live). Terminate the cables into the terminal block mounted on the base tray ensuring the correct polarity is observed and the luminaire is fully earthed. Ensure all conductors are fully sleeved and insulated.

STEP 5

Replace the diffuser into the fitting.


STEP 6

Restore the mains power supply, switch on and test for satisfactory operation.

This product may contain substances that can be hazardous to the environment if not disposed of properly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.



CLASS I EMERGENCY WIRING DETAILS



THIS IS A CLASS I PRODUCT AND MUST BE EARTHED

