







UP AND DOWN LED LIGHT

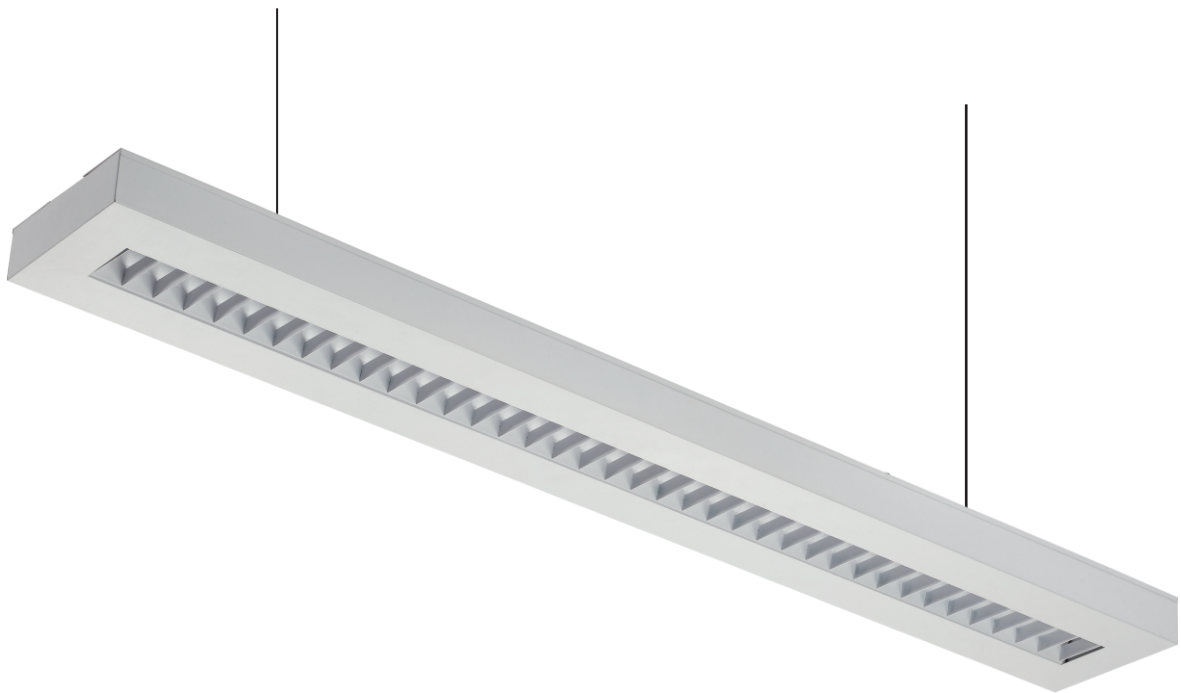


RoHS

Features & Benefits

1. 115lm/w for options.
2. Die formed of 0.5mm cold-rolled steel body.
3. universal voltage: 110-277v.
4. Available with suspending installation and surface-mounted installation.
5. Wide application for: school, hospital, super market, office and warehouse.
6. 4ft and 8ft dimensions for variety choices.
7. 5-year warranty.

Product Dimension

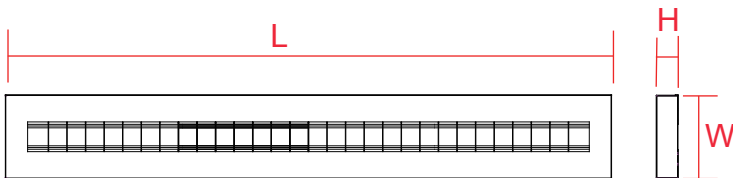

Model	L×W×H
P1835-504F	1206x170x50(mm) 23.15"x6.69"x1.97"
P1835-808F	2445x170x50 (mm) 46.77"x6.69"x1.97"
P1835-1008F	2445x170x50(mm) 58.58"x6.69"x1.97"

Specification


Model	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
P1835-504F	50W	AC 110-277V	5750lm	115lm/W	3000K 4000K 5000K	120°	>80	>0.9	5Years
P1835-808F	80W		9200lm						
P1835-1008F	100W		11500lm						

The following multiple functions can be achieved according to customers' requests:


1. CCT options: 3000K, 4000K, 5000K.
2. Available with external or built-in microwave motion sensor.
3. Emergency: the power is 8W, it can still work in 1.5hrs while emergency situation.



Testing Report

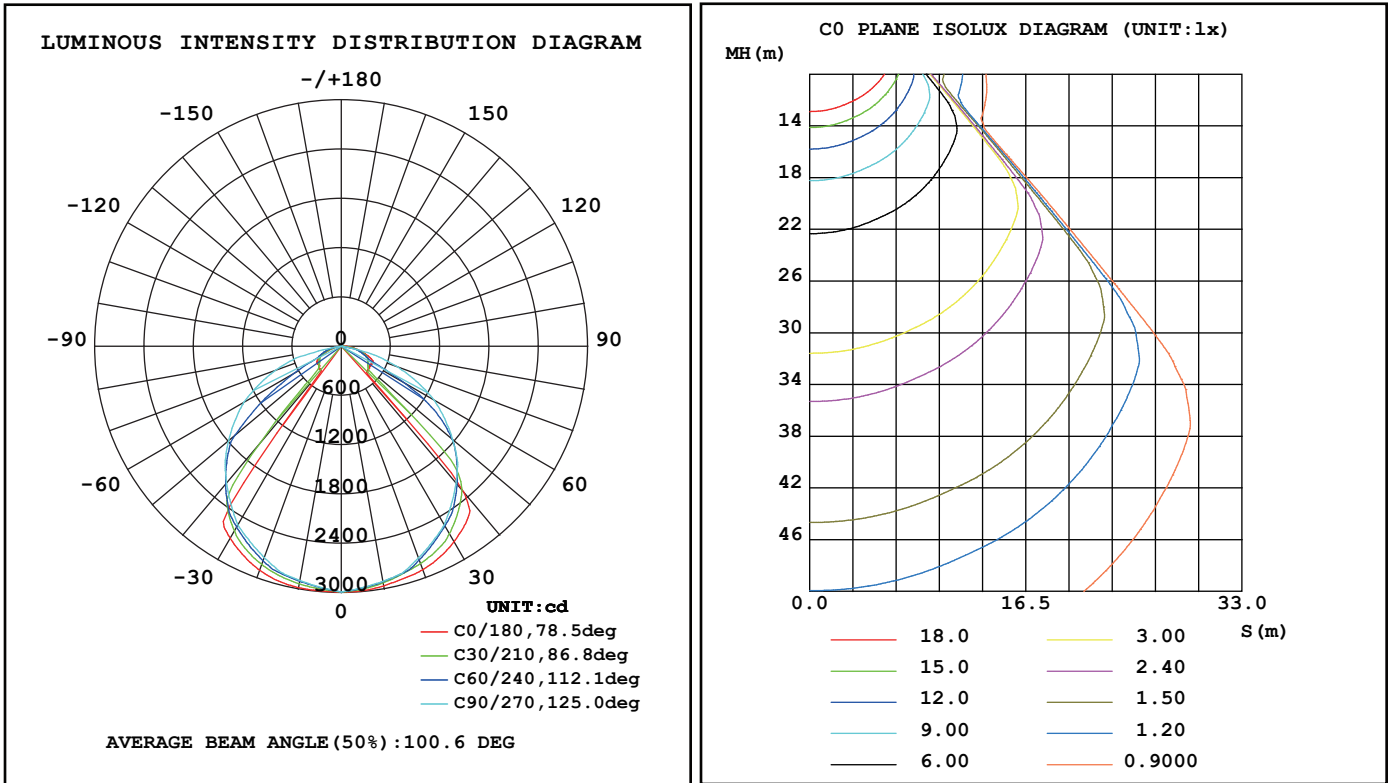


Applications

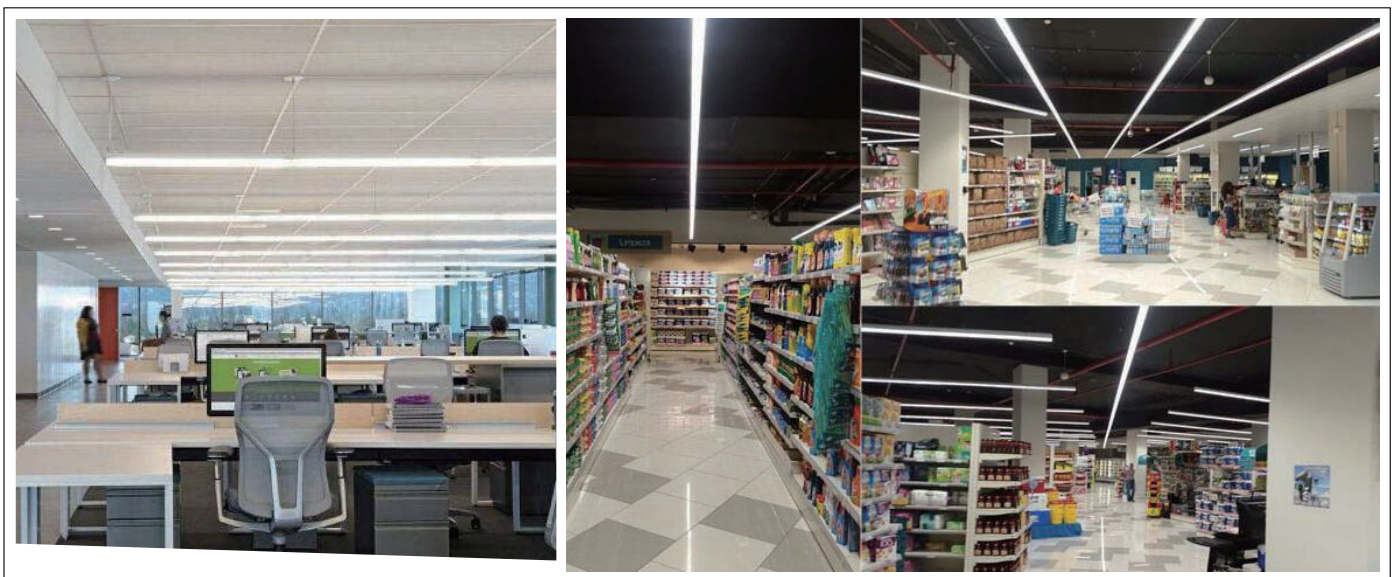





WATT AND CCT CHANGING

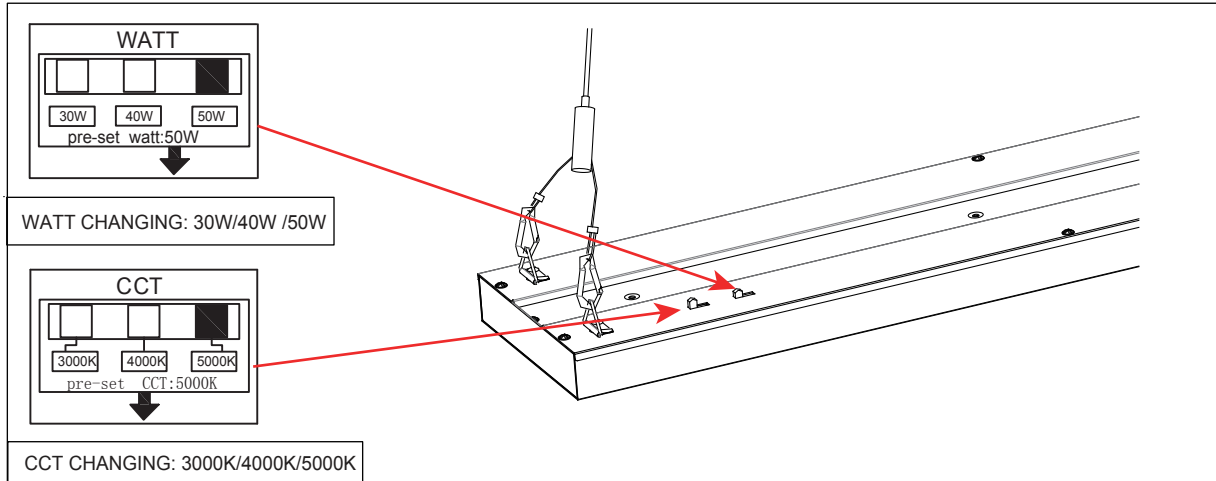


Installation manual Suspending installation

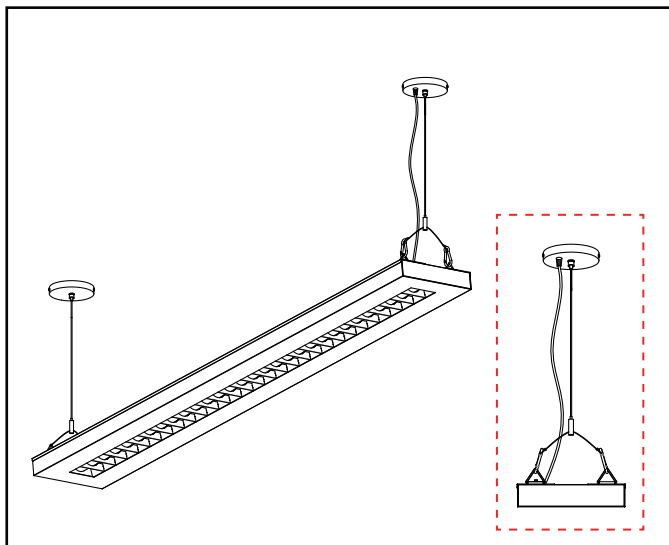


Step1. Adjusting the hanging rope length.

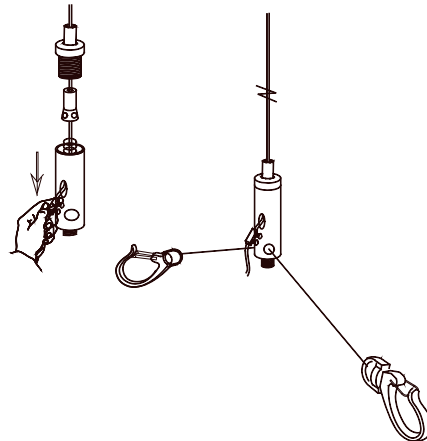


Step2

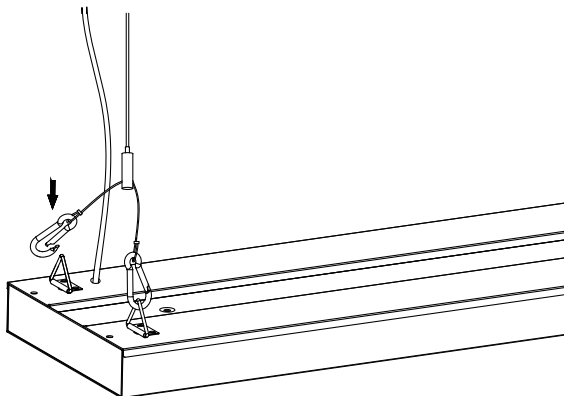


Step3. Fixing the hook and suspending the lamp.

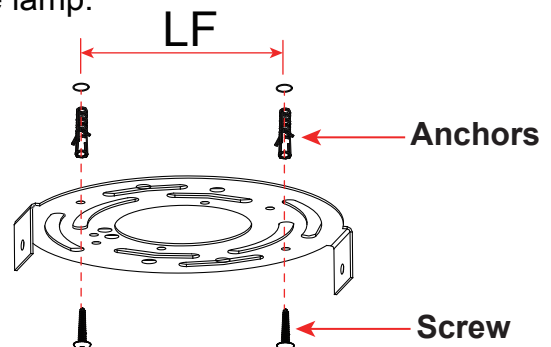


Step4. Turn off the power and wiring by using wire nuts.

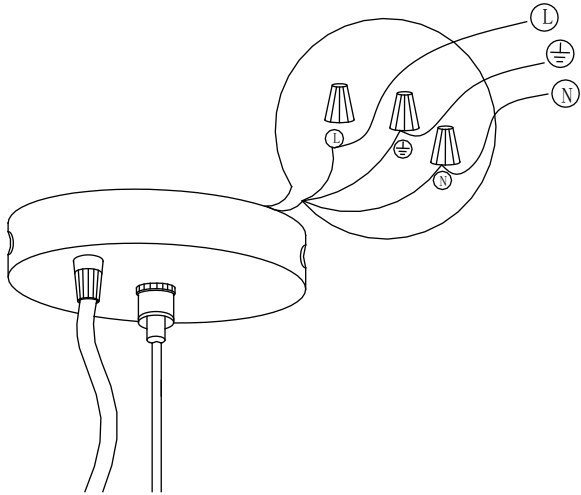


Step5.

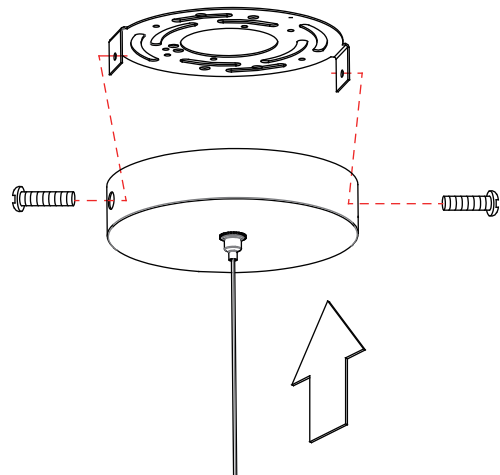

Step6. Turn on the switch.

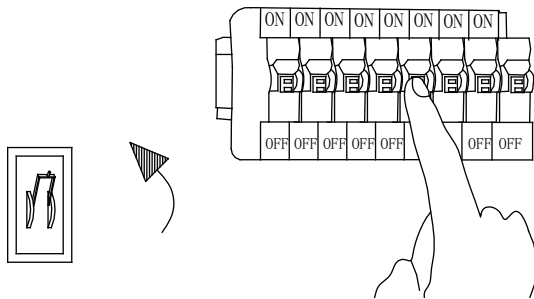

Step7. The installation completed.

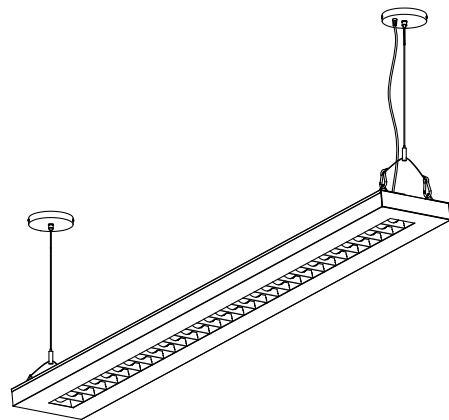



Important

Read this instruction carefully before installation. Keep it for further reference.
Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation.
This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

WARNING:

- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation.
- ⚠ Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
- ⚠ DO NOT exert force on the surface of the fixture.

Packing /weight

Model	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/Ctn (lbs/Kg)
P1835-504F	8.07"x2.56"x53.15" 205*65*1350mm	1	7.7/3.5	9.24/4.2
P1835-808F P1835-1008F	8.07"x2.56"x100.78" 205*65*2560mm	1	14.08/6.4	16.28/7.4

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~113°F, storage temperature: -22°F~140°F.