





Halcon lighting

Page 1 of 6

Lighting for the future

LED PENDANT LIGHT



RoHS



Features & Benefits


1. 110lm/w for options.
2. Formed body made of aluminum alloy.
3. universal voltage: 100-277v.
4. Available with suspending installation.
5. High-diffusion light-milky PC diffuser .
6. 5-year warranty.

Product Dimension



LED PENDANT LIGHT:P2334


Model	L × D × H
P2334-4FT	1205 x 85 x 45 (mm) / 47.44" x 3.346" x 1.77"
P2334-5FT	1497 x 85 x 45 (mm) / 58.94" x 3.346" x 1.77"
P2334-6FT	1797 x 85 x 45 (mm) / 70.75" x 3.346" x 1.77"

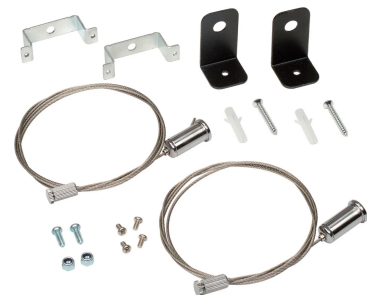


Specification

Part No.	Power	Input Voltage	Luminous Flux	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
P2334-4FT	35W	AC100-277V	3850lm	110lm/W	4000K	120 °	>80	>0.9	5Years
P2334-5FT	35W		3850lm						
P2334-6FT	35W		3850lm						

Testing Report

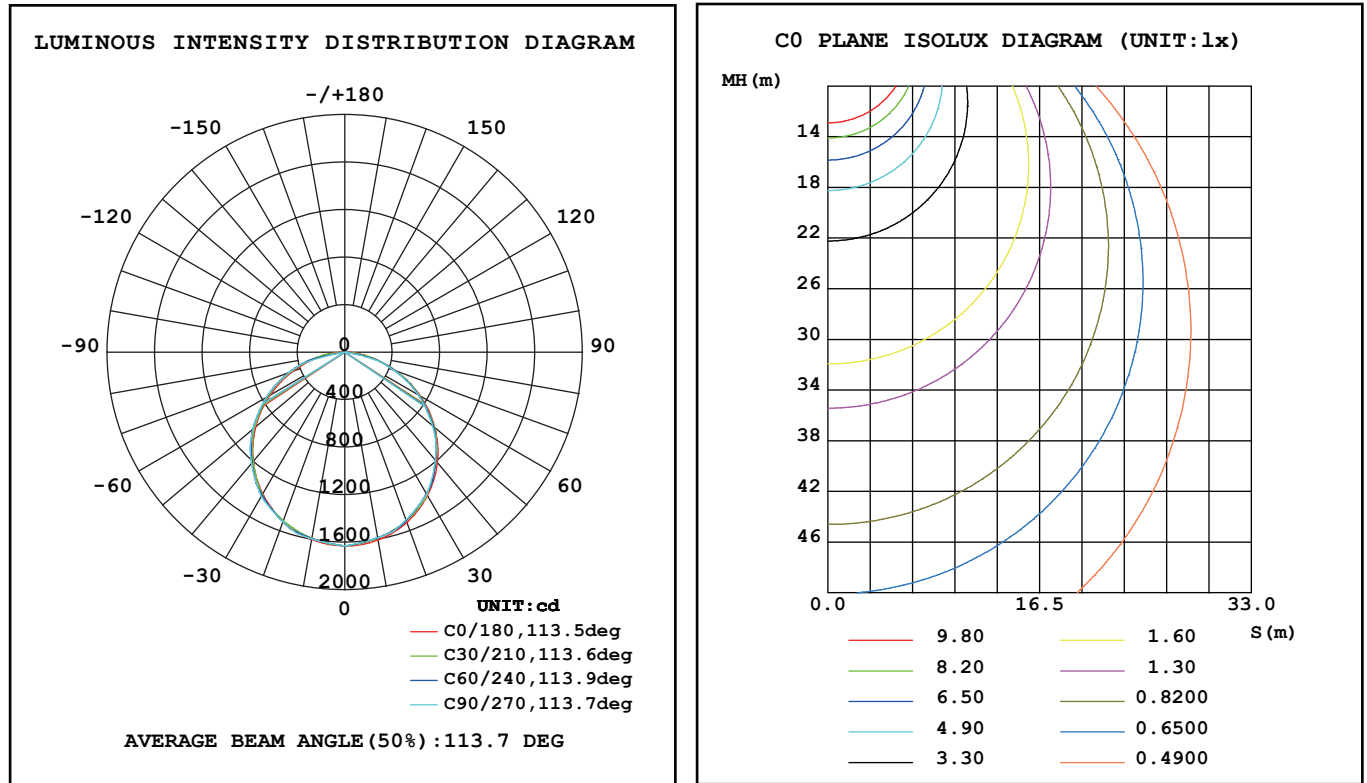

Applications

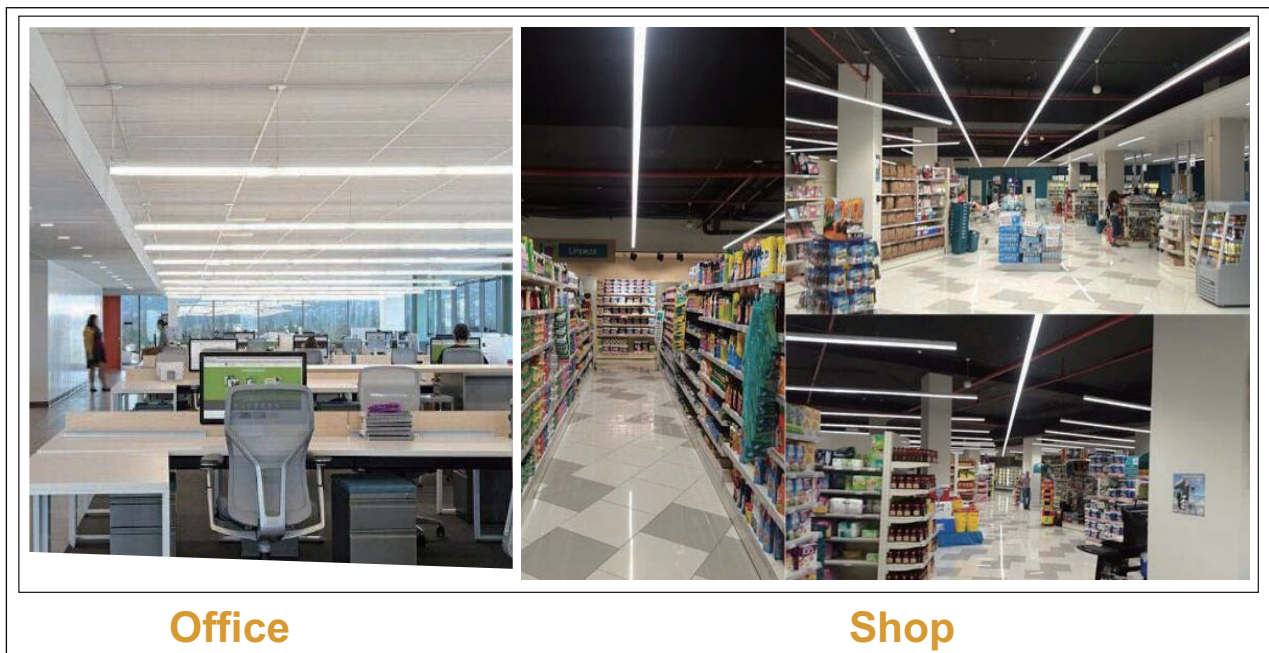



A.Surface-mounted installation

CONTENTS					
Ref.	Qty.	Description	Ref.	Qty.	Description
1	1	Light Fixture	H7	2	M4 x .7 x 6mm Thumb Screw
H1	2	Anchor	H8	4	M3 x .5 x 6mm Lg. Phillips Pan Head Screw
H2	2	Fixed Base	H9	2	L-Bracket
H3	2	#4 x 1.25 Lg. Phillips	H10	2	M4 x .7 Hex Bolt
H4	2	Pan Head Screw	H11	2	M4 x .7 x 6mm Lg. Phillips Pan Head Screw
H5	2	Cable Gripper			
H6	2	Steel Cable			
		Mounting Bracket			

SAVE FOR FUTURE REFERENCE


Note: When using electrical appliances, please follow these basic precautions to reduce the risk of fire, electric shock, and personal injury or property damage.

⚠ WARNING






- Operate the unit from a power source of equal voltage, frequency, and rating as indicated on the product identification plate.
- Do not install this product on damp, moist, or newly plastered surfaces.
- Fixture LEDs are not replaceable.
- **DO NOT INSTALL DAMAGED PRODUCTS!**
- Installation, service, and maintenance should be performed by a qualified licensed electrician.

- This unit must be plugged into grounded outlet.
- Do not operate unit if cord/plug has been dropped or damaged in any manner.
- To reduce the risk of electric shock, do not expose unit or power cord to moisture.
- The use of attachments or accessories is not recommended or intended for use with product.
- This unit is not intended for hazardous locations.
- Do not attempt to dismantle the unit.
- Turn off power and unplug prior to performing any maintenance.

Model #	P2334-4FT	P2334-5FT	P2334-6FT
Length	48"	60"	72"
Rating	100-277/35Watt/60HZ	100-277/35Watt/60HZ	100-277/35Watt/60HZ
Lumen	3850	4375	4375
Color Temp	4000K	4000K	4000K
Beam Angle	110	110	110
Cord	8ft. grounded cordset	8ft. grounded cordset	8ft. grounded cordset
On/Off switch	Pull String	Pull String	Pull String
X hole spacing	43" (1092mm)	57" (1447mm)	69" (1752mm)

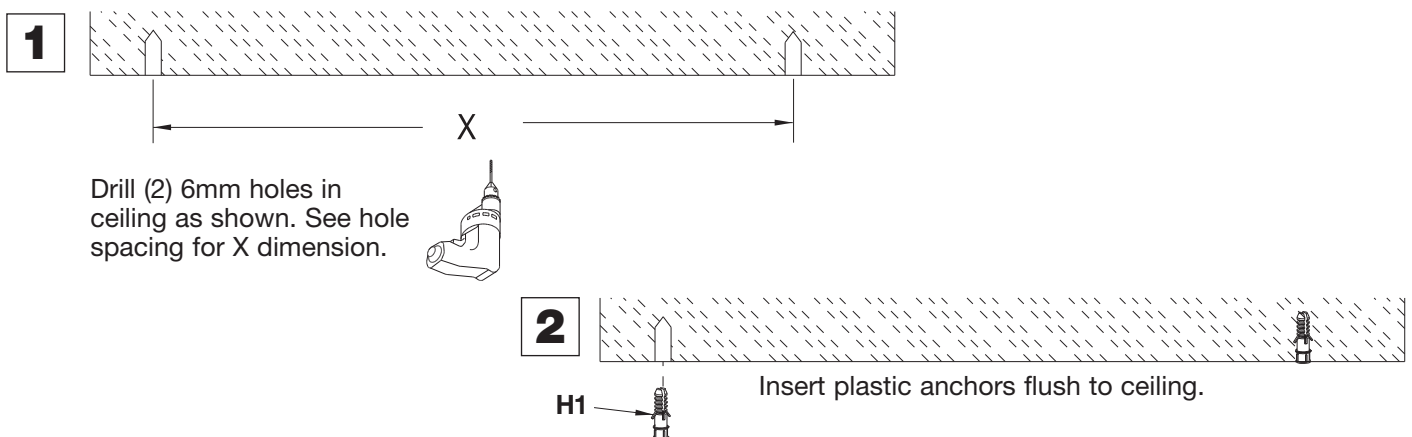

Lighting for the future

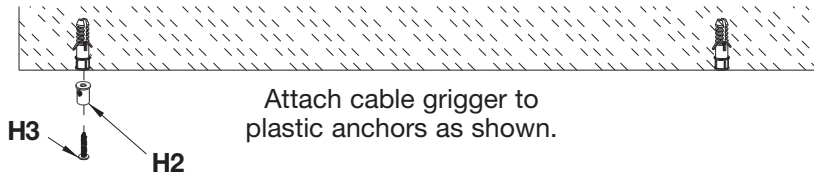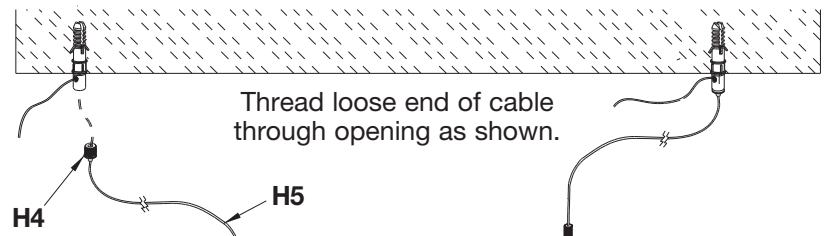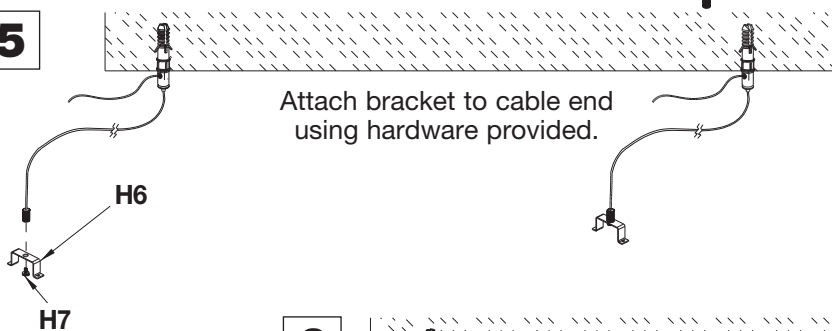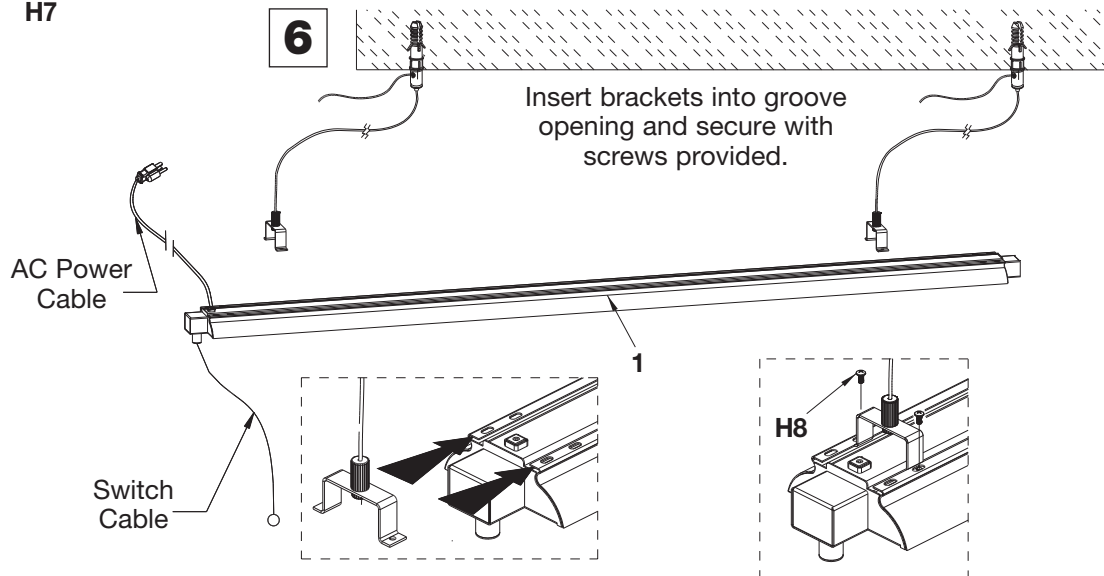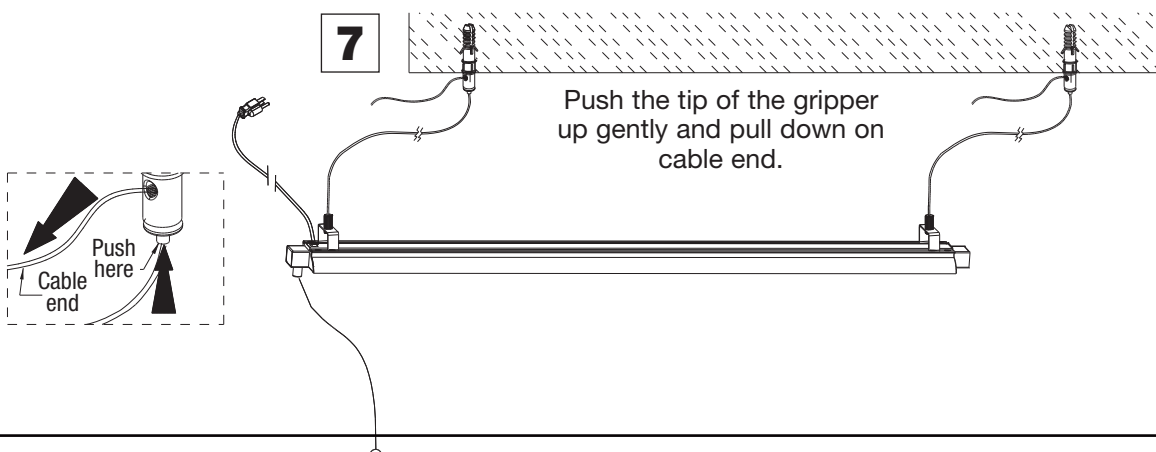3

4

5

6

7




Important

Read this instruction carefully before installation. Keep it for further reference.
Make electrical and grounded connections in accordance with the national electrical code and any applicable code. Always turn off the power supply before installation.
This product must be installed in accordance with the applicable installation code by a qualified electrician who is familiar with the construction and operation of the product and the hazards involved.

WARNING:

- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for wet locations. Always turn off the power supply before installation.
- ⚠ Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
- ⚠ DO NOT exert force on the surface of the fixture.

Packing /weight

Model No.	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/Ctn (lbs/Kg)
P2334-4FT	6.30" x 4.53" x 50.39" 160 x 115 x 1280 mm	1	3.83 / 1.74	4.93 / 2.24
P2334-5FT	6.30" x 4.53" x 61.81" 160 x 115 x 1570 mm	1	4.03 / 1.83	5.13 / 2.33
P2334-6FT	6.30" x 4.53" x 74.02" 160 x 115 x 1880 mm	1	4.47 / 2.03	5.57 / 2.53

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~113°F, storage temperature: -22°F~140°F.